



Numero di inventario: 22817

Lubrificazione

UNIMAG PFA-40



Dati tecnici

| | |
|-------------------------------|----------|
| Contenuto massima | 120 l |
| Capacità | 40 l/min |
| Larghezza del filtro in carta | 500 mm |
| Lunghezza filtro di carta | 90 m |
| Motore pompa | 25 W |
| Dimensioni: | |
| Lunghezza | 1200 mm |
| Larghezza | 720 mm |
| Altezza | 660 mm |





PFA-120

PFA PAPER FILTER

FEATURES:

1. Applicable to both ferrous and non-ferrous particles.
2. Filter paper moves forward automatically when contaminants accumulate and clog it.
3. Filtration effect depends on paper accuracy. Choose from 50 μ , 30 μ and 15 μ .
4. Not suitable for heavy machining for the sake of paper consumption. Use magnetic separator as pre-filter to reduce paper consumption.


Remark:

1. Standard accessory: one paper roll.
2. Special specification is available.

APPLICATION:

- | | |
|---------------------------------------|---------------------------|
| 1. Surface Grinding Machine | 5. Tread Grinding Machine |
| 2. Centerless Grinding Machine | 6. Gear Grinding Machine |
| 3. Internal/External Grinding machine | 7. Polisher |
| 4. Honing machine | |

DIMENSION DIAGRAM

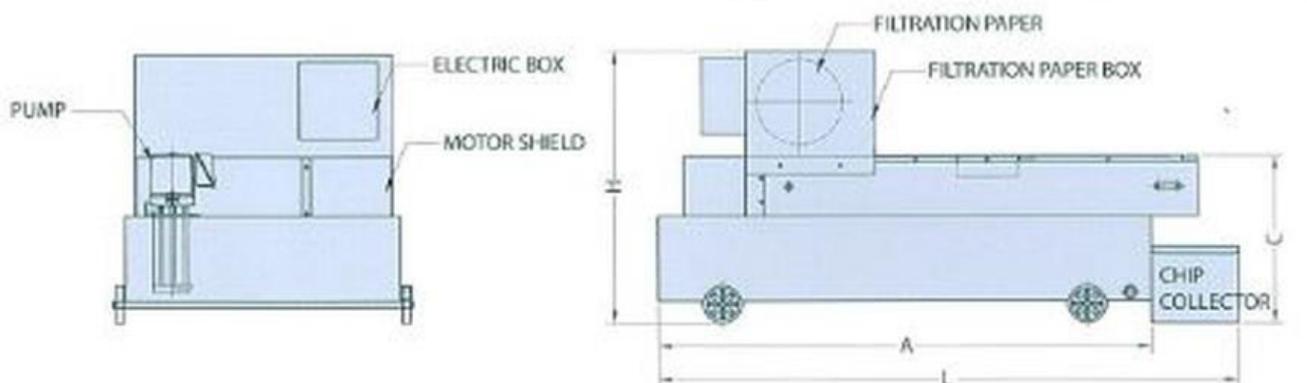

SPECIFICATION

| MODEL | CAPACITY L/MIN | TANK VOL. (L) | L | A | B | C | W | H | PUMP (HP) | | MOTOR | FILTER PAPER | Note |
|---------|-------------------|------------------|------|------|------|-----|------|-----|-----------|--------|-------|--------------------|----------|
| | | | | | | | | | HP | OUTLET | | | |
| PFA-20 | 20 | 100 | 1050 | 850 | 600 | 400 | 720 | 660 | 1/8 | PF1/2" | 25W | W: 500MM L: 90M | WHEEL |
| PFA-40 | 40 | 120 | 1200 | 1000 | 600 | 400 | 720 | 660 | 1/8 | PF1/2" | 25W | | |
| PFA-60 | 60 | 140 | 1350 | 1150 | 600 | 400 | 720 | 660 | 1/8 | PF1/2" | 25W | | |
| PFA-80 | 80 | 160 | 1500 | 1300 | 600 | 400 | 720 | 660 | 1/4 | PF3/4" | 25W | | |
| PFA-120 | 120 | 210 | 1500 | 1300 | 800 | 400 | 920 | 740 | 1/2 | PF3/4" | 40W | W: 700MM L: 90M | NO WHEEL |
| PFA-160 | 160 | 260 | 1800 | 1600 | 800 | 400 | 920 | 740 | 1/2 | PF3/4" | 40W | | |
| PFA-240 | 240 | 440 | 1550 | 1350 | 1060 | 430 | 1330 | 740 | 1 | PF1" | 60W | | |
| PFA-360 | 360 | 640 | 2150 | 1950 | 1060 | 430 | 1330 | 740 | 1 | PF1" | 60W | | |
| PFA-500 | 500 | 980 | 3240 | 2950 | 1060 | 430 | 1330 | 740 | 1X2 | PF1"X2 | 60W | | |