



Inventarnummer: 21567

Kühlmittelbehälter  
UNIMAG PFA-160



PFA-120

### PFA PAPER FILTER

#### FEATURES:

1. Applicable to both ferrous and non-ferrous particles.
2. Filter paper moves forward automatically when contaminants accumulate and clog it.
3. Filtration effect depends on paper accuracy. Choose from 50µ, 30µ and 15µ.
4. Not suitable for heavy machining for the sake of paper consumption. Use magnetic separator as pre-filter to reduce paper consumption.


#### Remark:

1. Standard accessory: one paper roll.
2. Special specification is available.

**APPLICATION:**

1. Surface Grinding Machine	5. Thread Grinding Machine
2. Centerless Grinding Machine	6. Gear Grinding Machine
3. Internal/External Grinding machine	7. Finisher
4. Honing machine	

#### DIMENSION DIAGRAM

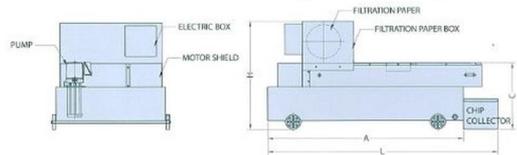


#### SPECIFICATION

MODEL	CAPACITY L/MIN	TANK VOL. (L)	L	A	B	C	W	H	PUMP (HP)	HP	OUTLET	MOTOR	FILTER PAPER	Notes
PFA-20	20	100	1050	850	600	400	720	660	1/8	PF1/2"	25W			
PFA-40	40	120	1300	1050	600	400	720	660	1/8	PF1/2"	25W	W: 500MM		
PFA-60	60	140	1350	1150	600	400	720	660	1/8	PF1/2"	25W	L: 900MM	WHEEL	
PFA-80	80	160	1500	1300	600	400	720	660	1/8	PF3/4"	25W			
PFA-120	120	210	1500	1300	800	400	920	740	1/2	PF3/4"	40W	W: 700MM		
PFA-160	160	260	1800	1600	800	400	920	740	1/2	PF3/4"	40W	L: 900MM		
PFA-240	240	440	1550	1350	1060	430	1330	740	1	PF1"	60W	W: 1000MM	NO WHEEL	
PFA-360	360	640	2150	1950	1060	430	1330	740	1	PF1"	60W	L: 900MM		
PFA-500	500	980	3240	2950	1060	430	1330	740	1X2	PF1"X2	60W			

## Technische Daten

Totalinhalt	260 l
Kapazität	160 l/min
Papierfilterbreite	700 mm
Papierfilterlänge	90 mm
Pumpenmotorleistung	40 W
Abmessungen:	
Länge	1800 mm
Breite	920 mm
Höhe	740 mm

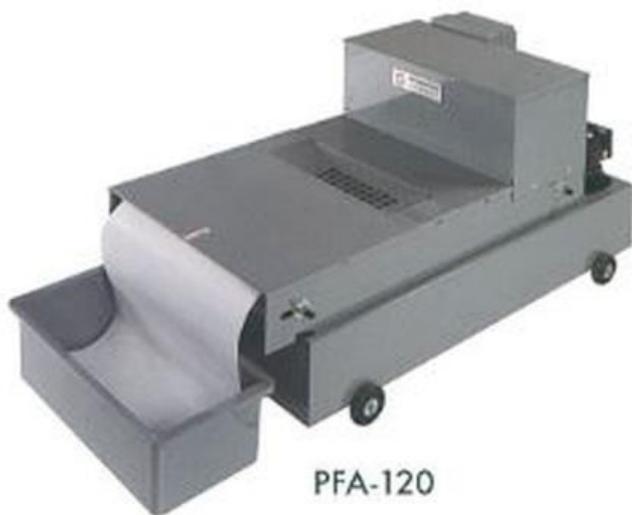

PFA-120

## PFA PAPER FILTER

### FEATURES:

1. Applicable to both ferrous and non-ferrous particles.
2. Filter paper moves forward automatically when contaminants accumulate and clog it.
3. Filtration effect depends on paper accuracy. Choose from 50 $\mu$ , 30 $\mu$  and 15 $\mu$ .
4. Not suitable for heavy machining for the sake of paper consumption. Use magnetic separator as pre-filter to reduce paper consumption.




### Remark:

1. Standard accessory: one paper roll.
2. Special specification is available.

### APPLICATION:

- |                                       |                           |
|---------------------------------------|---------------------------|
| 1. Surface Grinding Machine           | 5. Tread Grinding Machine |
| 2. Centerless Grinding Machine        | 6. Gear Grinding Machine  |
| 3. Internal/External Grinding machine | 7. Polisher               |
| 4. Honing machine                     |                           |

### DIMENSION DIAGRAM

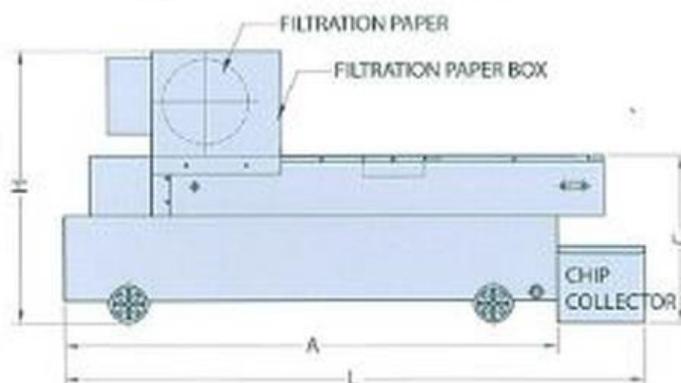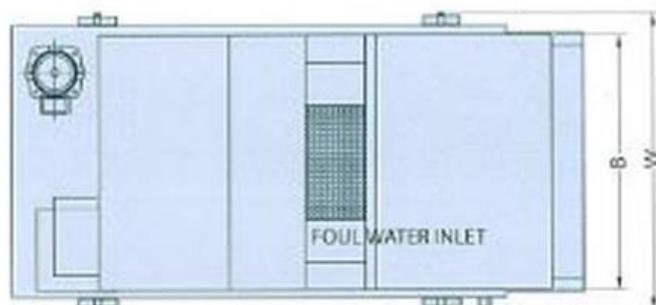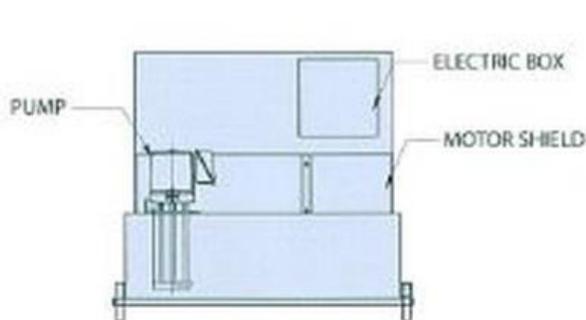

### SPECIFICATION

MODEL	CAPACITY L/MIN	TANK VOL. (L)	L	A	B	C	W	H	PUMP (HP)		MOTOR	FILTER PAPER	Note
									HP	OUTLET			
PFA-20	20	100	1050	850	600	400	720	660	1/8	PF1/2"	25W	W: 500MM L: 90M	WHEEL
PFA-40	40	120	1200	1000	600	400	720	660	1/8	PF1/2"	25W		
PFA-60	60	140	1350	1150	600	400	720	660	1/8	PF1/2"	25W		
PFA-80	80	160	1500	1300	600	400	720	660	1/4	PF3/4"	25W		
PFA-120	120	210	1500	1300	800	400	920	740	1/2	PF3/4"	40W		
PFA-160	160	260	1800	1600	800	400	920	740	1/2	PF3/4"	40W	W: 700MM L: 90M	
PFA-240	240	440	1550	1350	1060	430	1330	740	1	PF1"	60W		
PFA-360	360	640	2150	1950	1060	430	1330	740	1	PF1"	60W	W: 1000MM L: 90M	NO WHEEL
PFA-500	500	980	3240	2950	1060	430	1330	740	1X2	PF1"X2	60W		

