MULLER MACHINES SA
BRÜGG/BIENNE

Industriestrasse 22
CH-2555 Bruegg

T +41 32 373 34 44
F +41 32 373 48 27

E sales@mullermachines.ch
W www.mullermachines.ch

Numero di inventario: 22820

Lubrificatione
UNIMAG PFA-40

Dati technici

Contenudo massima	120 l
Capacità	40 l/min
Larghezza del filtro in carta	500 mm
Lunghezza filtro di carta	90 m
Motore pompa	25 W
Dimensioni:	
Lunghezza	1200 mm
Larghezza	720 mm
Altezza	660 mm

PFA

PAPER FILTER

PFA-120

FEATURES:

1. Applicable to both ferrous and non-ferrous particles.
2. Filter paper moves forward automatically when contaminants accumulate and clog it.
3. Filtration effect depends on paper accuracy. Choose from 50μ, 30μ and 15μ.
4. Not suitable for heavy machining for the sake of paper consumption. Use magnetic separator as pre-filter to reduce paper consumption.

Remark:

1. Standard accessory: one paper roll.
2. Special specification is available.

APPLICATION:	
1. Surface Grinding Machine	5. Tread Grinding Machine
2. Centerless Grinding Machine	6. Gear Grinding Machine
3. Internal/External Grinding machine	7. Polisher
4. Honing machine	

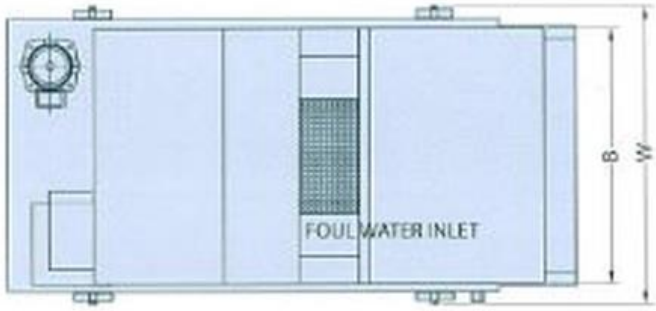

DIMENSION DIAGRAM

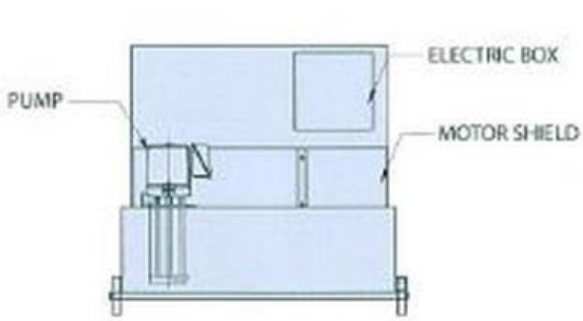

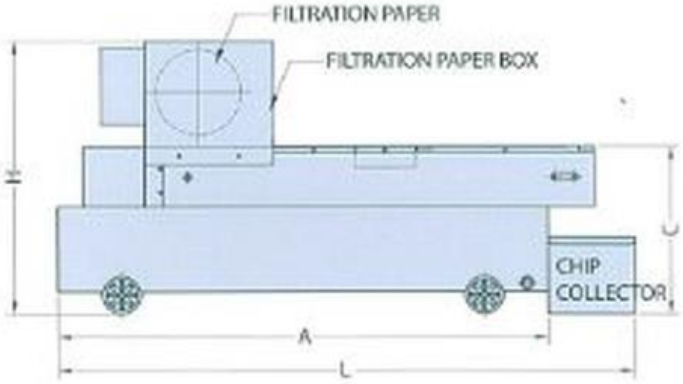

SPECIFICATION

MODEL	CAPACITY L/MIN	TANK VOL (L)	L	A	B	C	W	H	PUMP (HP)		MOTOR	FILTER PAPER	Note
									HP	OUTLET			
PFA-20	20	100	1050	850	600	400	720	660	1/8	PF1/2"	25W	W: 500MM L: 90M	WHEEL
PFA-40	40	120	1200	1000	600	400	720	660	1/8	PF1/2"	25W		
PFA-60	60	140	1350	1150	600	400	720	660	1/8	PF1/2"	25W		
PFA-80	80	160	1500	1300	600	400	720	660	1/4	PF3/4"	25W		
PFA-120	120	210	1500	1300	800	400	920	740	1/2	PF3/4"	40W	W: 700MM L: 90M	
PFA-160	160	260	1800	1600	800	400	920	740	1/2	PF3/4"	40W		
PFA-240	240	440	1550	1350	1060	430	1330	740	1	PF1"	60W	W: 1000MM L: 90M	NO WHEEL
PFA-360	360	640	2150	1950	1060	430	1330	740	1	PF1"	60W		
PFA-500	500	980	3240	2950	1060	430	1330	740	1X2	PF1"X2	60W		